



TownGuide Performer

BDP104 LED30/740 II DM PCC SI CLO-LS-8 6

TOWNGUIDE PERF T - LED module 3000 lm - Distribution medium - Polycarbonate bowl/cover clear

The TownGuide Performer family consists of six recognizable yet modern shapes: Flat Cone, Bowl, Classic Cone, Classic, T and Tzero. All are available with a clear bowl. Except for Tzero, also a frosted bowl can be chosen. With an extensive range of lumen packages and a choice of light colors and operating lifetimes, it is easy to select the version that best suits your project's specific requirements. In addition, TownGuide Performer has a variety of control system options that can make it an integral part of your smart energy-reduction programs – from stand-alone LumiStep and DynaDimmer, SDU switch-dim control, through to seamless remote connectivity with CityTouch lighting management software. Installation is easy. Thanks to the bayonet whistle connector with integrated gland located in the spigot, the luminaire does not have to be opened at all for installation. Philips has made every effort to make the Total Cost of Ownership (TCO) of the luminaire as attractive as possible. And as TownGuide Performer is a dedicated LED luminaire, compatible with a variety of control systems, the energy and maintenance cost savings compared to conventional lighting are significant.

Product data

| General Information | | | |
|-------------------------------|--------------------------------------------------------------------------------------|-----------------------------|----------------------------------------------------------------|
| Number of light sources | 4 [4 pcs] | Driver included | Yes |
| Lamp family code | LED30 [LED module 3000 lm] | Optical cover/lens type | PCC [Polycarbonate bowl/cover clear] |
| Light source colour | 740 neutral white | Luminaire light beam spread | 53° x 71° |
| Light source replaceable | Yes | Embedded control | CLO-LS-8 [Constant light output and LumiStep dimming 8 hours] |
| Number of gear units | 1 unit | Control interface | - |
| Driver/power unit/transformer | PSDD-CLO [Power supply unit with DynaDimmer and constant light output (integrated)] | Light regulation | Dimming via DynaDimmer integrated in ballast or driver |
| | | Connection | Screw connection block 5-pole |

TownGuide Performer

| | |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cable | - |
| Protection class IEC | Safety class II (II) |
| Parts colour | All parts colored |
| Coating | - |
| Glow-wire test | 650/5 [Temperature 650 °C, duration 5 s] |
| Flammability mark | NO [-] |
| Safety device | PCBC [PCB cover] |
| CE mark | CE mark |
| ENEC mark | ENEC mark |
| Warranty period | 5 years |
| Optic type outdoor | Distribution medium |
| Photocell | No [-] |
| Constant light output | Yes |
| Number of products on MCB (16 A type B) | 20 |
| EU RoHS compliant | Yes |
| WEEE mark | - |
| Light source engine type | LED |
| Serviceability class | Class A, the luminaire is equipped with serviceable parts (when applicable): LED board, driver, control units, surge-protection device, optics, front cover and mechanical parts |
| Product family code | BDP104 [TOWNGUIDE PERF T] |

Light Technical

| | |
|--------------------------------|----|
| Upward light output ratio | 3 |
| Standard tilt angle post-top | 0° |
| Standard tilt angle side entry | - |

Operating and Electrical

| | |
|-------------------------------|-------------|
| Input Voltage | 220-240 V |
| Input frequency | 50 to 60 Hz |
| Initial CLO power consumption | 19.2 W |
| Average CLO power consumption | 19.4 W |
| End CLO power consumption | 19.6 W |
| Inrush current | 22 A |
| Inrush time | 0.29 ms |
| Power factor (min.) | 0.95 |
| Power factor (nom.) | 0.93 |

Controls and Dimming

| | |
|----------|-----|
| Dimmable | Yes |
|----------|-----|

Mechanical and Housing

| | |
|-----------------------------|---------------|
| Housing material | Aluminum |
| Reflector material | - |
| Optic material | Acrylate |
| Optical cover/lens material | Polycarbonate |
| Fixation material | Steel |

| | |
|-------------------------------------|------------------------------------------|
| Mounting device | 62P [Post-top for diameter 62 mm] |
| Optical cover/lens shape | Narrow |
| Optical cover/lens finish | Clear |
| Torque | 15 |
| Overall height | 277 mm |
| Overall diameter | 570 mm |
| Effective projected area | 0.053 m ² |
| Colour | Silver |
| Dimensions (height x width x depth) | 277 x NaN x NaN mm (10.9 x NaN x NaN in) |

Approval and Application

| | |
|----------------------------------------|------------------------------------------------------------------------------------|
| Ingress protection code | IP66 [Dust penetration-protected, jet-proof] |
| Mech. impact protection code | IK10 [20 J vandal-resistant] |
| Surge protection (common/differential) | Luminaire surge protection level up to 6 kV differential mode and 6 kV common mode |

Initial Performance (IEC Compliant)

| | |
|----------------------------------------|----------------------|
| Initial luminous flux (system flux) | 2204 lm |
| Luminous flux tolerance | +/-7% |
| Initial LED luminaire efficacy | 115 lm/W |
| Init. Corr. Colour Temperature | 4000 K |
| Init. Colour rendering index | 70 |
| Initial chromaticity | (0.38, 0.38) SDCM <5 |
| Initial input power | 19.6 W |
| Power consumption tolerance | +/-10% |
| Init. colour rendering index tolerance | +/-2 |

Over Time Performance (IEC Compliant)

| | |
|-----------------------------------------------------------|------|
| Control gear failure rate at median useful life 100,000 h | 10 % |
| Lumen maintenance at median useful life* 100,000 h | 97 |

Application Conditions

| | |
|------------------------------------|---------------|
| Ambient temperature range | -40 to +35 °C |
| Performance ambient temperature Tq | 25 °C |
| Maximum dimming level | 50% |


Product Data

| | |
|-----------------------------------|------------------------------------------|
| Full product code | 871829190623000 |
| Order product name | BDP104 LED30/740 II DM PCC SI CLO-LS-8 6 |
| EAN/UPC – product | 8718291906230 |
| Order code | 90623000 |
| SAP numerator – quantity per pack | 1 |
| Numerator – packs per outer box | 1 |
| SAP material | 910500991024 |
| SAP net weight (piece) | 6.850 kg |



TownGuide Performer

Dimensional drawing

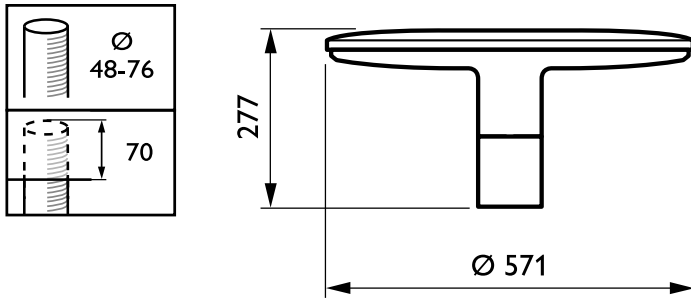

TownGuide Performer BDP100-105

