



CoreLine Panel

RC132V G4 LED36S/840 PSU W60L60 OC ELB3

CORELINE PANEL - 840 neutral white - Power supply unit

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Panel range of LED products can be used to replace functional luminaires in general lighting applications. Both Non-Office Compliant (NOC) version and Office Compliant version (OC) are now available. The process of selecting, installing and maintaining is so easy – it's a simple switch.

Product data

General Information	
Beam angle of light source	- °
Light source colour	840 neutral white
Light source replaceable	No
Number of gear units	1 unit
Driver/power unit/transformer	PSU [Power supply unit]
Driver included	Yes
Optic type	90 [Beam angle 90°]
Luminaire light beam spread	90°
Control interface	-
Connection	Push-in connector 4-pole
Cable	-
Protection class IEC	Safety class II (II)
Glow-wire test	850/30 [Temperature 850 °C, duration 30 s]
Flammability mark	NO [-]
CE mark	CE mark
ENEC mark	ENEC mark
Warranty period	5 years

Constant light output	No
Number of products on MCB (16 A type B)	65
Photobiological risk	Photobiological risk group 0 @ 200mm to EN62471
EU RoHS compliant	Yes
Product family code	RC132V [CORELINE PANEL]
Unified glare rating CEN	19

Light Technical

Saturated Red	<50
Flickering	1
Stroboscopic effect	1.6

Operating and Electrical

Input Voltage	220 to 240 V
Input frequency	50 to 60 Hz
Initial CLO power consumption	- W
Average CLO power consumption	- W
Inrush current	5.3 A

CoreLine Panel

Inrush time	0.052 ms
Power factor (min.)	0.9

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Housing material	Steel
Reflector material	Acrylate
Optic material	Polystyrene
Optical cover/lens material	Polystyrene
Fixation material	-
Optical cover/lens finish	Opal
Overall length	595 mm
Overall width	595 mm
Overall height	16 mm
Colour	White
Dimensions (height x width x depth)	16 x 595 x 595 mm (0.6 x 23.4 x 23.4 in)

Approval and Application

Ingress protection code	IP20/44 [Finger-protected; wire-protected, splash-proof]
Mech. impact protection code	IK03 [0.3 J]
Sustainability rating	-

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	3600 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	123 lm/W
Init. Corr. Colour Temperature	4000 K
Init. Colour rendering index	>80
Initial chromaticity	(0.38, 0.38) SDCM <3
Initial input power	33 W

Power consumption tolerance	+/-10%
-----------------------------	--------

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life	5 %
50,000 h	
Lumen maintenance at median useful life*	-
35,000 h	
Lumen maintenance at median useful life*	L80
50,000 h	
Lumen maintenance at median useful life*	-
75,000 h	
Lumen maintenance at median useful life*	-
100,000 h	

Application Conditions


Ambient temperature range	+10 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dimming level	1%
Suitable for random switching	Not applicable

Product Data

Full product code	871869996711600
Order product name	RC132V G4 LED36S/840 PSU W60L60 OC ELB3
EAN/UPC – product	8718699967116
Order code	96711600
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
SAP material	910505100533
SAP net weight (piece)	4.500 kg





Dimensional drawing

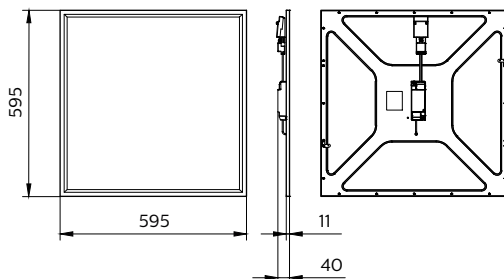

RC132V G4 LED36S/840 PSU W60L60 OC ELB3

CoreLine Panel

Photometric data

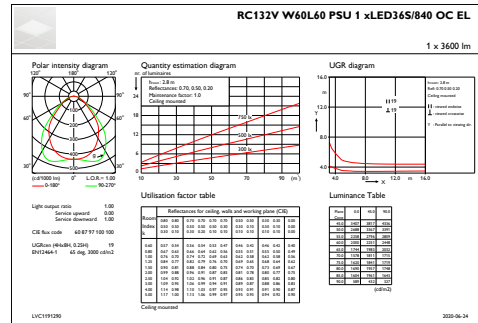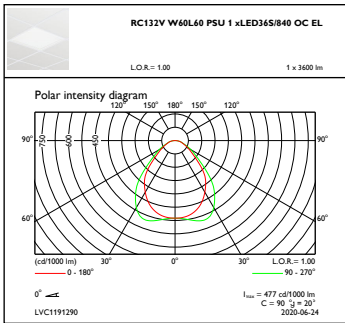

OFPC1_RC132VW60L60PSU1xLED36S840OCEL

IFGU1_RC132VW60L60PSU1xLED36S840OCEL

