



Actinic BL PL-S/PL-L

Actinic BL PL-S 9W/10/2P 1CT/6X10BOX

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information	
Cap base	G23 [G23]
Main application	Insect traps
Life to 50% failures (nom.)	1000 h
Useful life (nom.)	2000 h
Light technical	
Colour Code	210 [lead-free 360 glass (10)]
Colour designation	Ultra Violet A
Chromaticity coordinate X (nom.)	227
Chromaticity coordinate Y (nom.)	212
UV Depreciation at 2,000 h	20 %
Operating and electrical	
Power (Rated) (Nom)	8.6 W


Lamp current (nom.)	0.17 A
Voltage (Nom)	60 V
Mechanical and housing	
Cap-base information	2 Pins (2P)
Bulb shape	2xT12
UV	
UV-B/UV-A (IEC)	0.1 %
UV-A radiation 100 hours (IEC)	1.66 W
Product data	
Full product code	871150095194680
Order product name	Actinic BL PL-S 9W/10/2P 1CT/6X10BOX
EAN/UPC – product	8711500951946

Actinic BL PL-S/PL-L

Order code	95194680
SAP numerator – quantity per pack	1
Local code description	Actinic BL PL-S 9W/10/2P 1CT/6X10BOX
Numerator – packs per outer box	60

SAP material	927901721008
Net Weight (Piece)	32.000 g



Dimensional drawing



Product	D1 (max)	D (max)	A (max)	B (max)	C (max)
Actinic BL PL-S 9W/10/2P 1CT/6X10BOX	13 mm	28 mm	128.8 mm	144.5 mm	167 mm

Actinic BL PL-S 9W/10/2P 1CT/6X10BOX

Photometric data

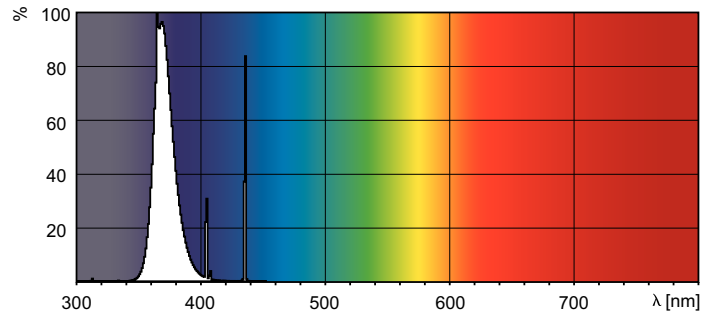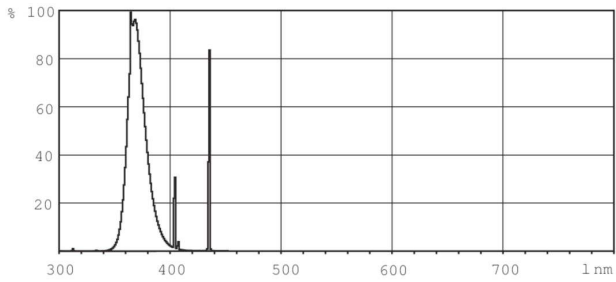

XDPB_XUAPLS_10_110_210-Spectral power distribution B/W

XDPO_XUAPLS_10_110_210-Spectral power distribution Colour

