



Flexo Print

TL 60W/10-R 1SL/25

Flexo print TL lamps emit almost all of their light (99.9%) in the useful UVA and visible blue wavebands – between 350 and 400 nm – and have peak intensity at 370 nm (except for the /03 version). This makes them ideal for flexo printing equipment and photopolymerization processes. In addition, the 'R' lamps in the family have an internal 200-degree reflector to further optimize the lamp's overall efficiency.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	G13 [Medium Bi-Pin Fluorescent]
Main application	Reprography (R)
Life to 50% failures (nom.)	2000 h
Useful life (nom.)	1000 h

Light Technical	
Colour Code	10-R
Colour designation	Ultra Violet A
Chromaticity coordinate X (nom.)	222
Chromaticity coordinate Y (nom.)	210
Depreciation at 500 Hours	10 %
UV depreciation at 1,000 h	15 %
UV Depreciation at 2,000 h	30 %

Operating and Electrical	
Power (Rated) (Nom)	62 W
Lamp current (nom.)	0.7 A
Voltage (Nom)	102 V

Mechanical and Housing	
Bulb shape	T38 [T 38mm]

Approval and Application	
Mercury (Hg) content (nom.)	13.0 mg

UV	
UV-B/UV-A (IEC)	0.1 %
UV-A radiation 100 hours (IEC)	15.8 W


Flexo Print

Product Data

Full product code	871150061572540
Order product name	TL 60W/10-R SLV/25
EAN/UPC – product	8711500615725
Order code	61572540
SAP numerator – quantity per pack	1

Numerator – packs per outer box	25
SAP material	928008401003
SAP net weight (piece)	260.200 g


Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL 60W/10-R SLV/25	40.5 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

TL 60W/10-R

Photometric data

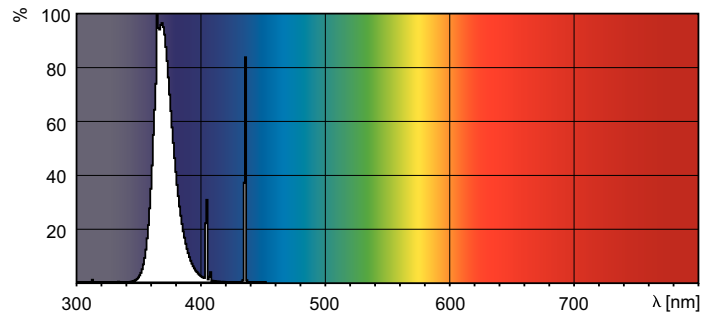

XDPO_XUVATL_10-R-Spectral power distribution Colour

