



MASTERCcolour CDM-T

MASTERCcolour CDM-T 70W/942 G12 1CT/12

Range of single-ended, compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Lamps may use electronic or electromagnetic control gear, except 35W/942 and 20W lamps, which must use electronic control gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information		Lumen maintenance 10,000 hours (nom.)		
Cap base	G12 [G12]	Lumen maintenance 2,000 hours (min.)	65 %	
Operating position	UNIVERSAL [Any or Universal (U)]	Lumen maintenance 2,000 hours (nom.)	75 %	
Life to 5% failures (nom.)	9000 h	Lumen maintenance 5,000 hours (min.)	85 %	
Life to 10% failures (nom.)	10000 h	Lumen maintenance 5,000 hours (nom.)	65 %	
Life to 20% failures (nom.)	11000 h	Chromaticity coordinate X (nom.)	75 %	
Life to 50% failures (nom.)	12000 h	Chromaticity coordinate Y (nom.)	0.377	
ANSI code HID	C139/E	Correlated Colour Temperature (Nom)	0.376	
Light technical		Colour rendering index (nom.)	4200 K	
Colour Code	942 [CCT of 4,200 K]	Luminous efficacy (rated) (nom.)	85 lm/W	
Luminous flux (rated) (nom.)	6200 lm	Power (Rated) (Nom)	92	
Colour designation	Cool White (CW)	Operating and electrical		
		Power (Rated) (Nom)		73.2 W

MASTERCcolour CDM-T

Lamp current run-up (max.)	1.4 A
Lamp current (EM) (nom.)	0.98 A
Ignition supply voltage (max.)	198 V
Ignition peak voltage (max.)	5000 V
Ignition supply voltage (min.)	198 V
Ignition peak voltage (min.)	3500 V
Re-ignition time (min.) (max.)	15 min
Ignition time (max.)	30 s
Voltage (Max)	96 V
Voltage (Min)	80 V
Voltage (Nom)	88 V

Controls and dimming

Dimmable	No
Run-up time 90% (max.)	3 min

Mechanical and housing

Lamp Finish	Clear
Bulb shape	T19 [T 19mm]

Approval and application

Mercury (Hg) content (nom.)	6.1 mg
Energy consumption kWh/1,000 hours	80 kWh

UV

PET (NIOSH) (min.)	8 h/500lx
--------------------	-----------

Damage factor D/fc (max.)	0.4
---------------------------	-----


Luminaire design requirements

Bulb temperature (max.)	500 °C
Cap-base temperature (max.)	280 °C
Cap-Base Temperature (Max)-DUP(do not use)	536 °F
Pinch temperature (max.)	350 °C
Pinch Temperature (Max)-DUP(do not use)	350 °C

Product data

Full product code	871869648449400
Order product name	MASTERCcolour CDM-T 70W/942 G12 1CT/12
EAN/UPC – product	8718696484494
Order code	48449400
SAP numerator – quantity per pack	1
Local code description	LAMPADA HALETO METALICO CDM-T70W/942G12
Numerator – packs per outer box	12
SAP material	928084505129
Net Weight (Piece)	29.000 g
ILCOS code	MT/UB-70/942-H-G12-20/90

Dimensional drawing




MASTERColour CDM-T 70W/942 G12 1CT/12

Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MASTERColour CDM-T 70W/942 G12 1CT/12	20 mm	0.75 in	6 mm	55 mm	57 mm	56 mm	103 mm



MASTERC colour CDM-T

Photometric data

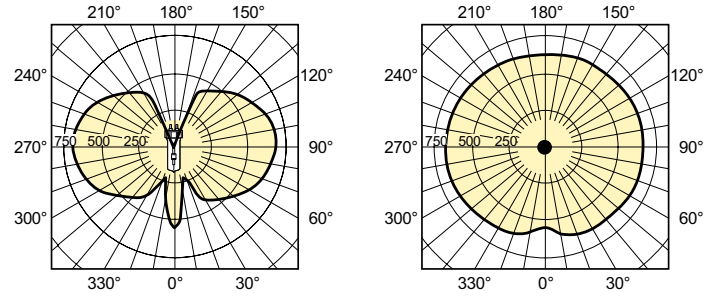

LDLD_CDM-T_70W_830_942-Light distribution diagram

Lifetime

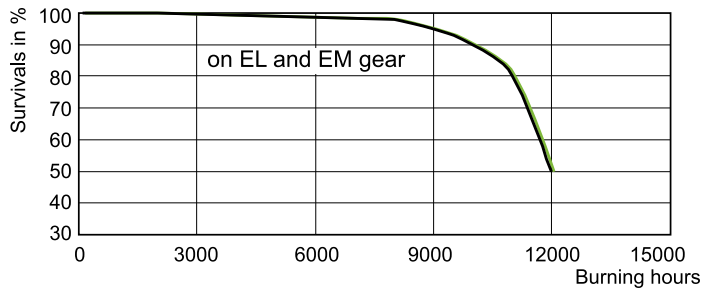

LDLE_CDM-T_70W_942-Life expectancy diagram

