



MASTER SON-T APIA Plus Xtra

MASTER SON-T APIA Plus Xtra 150W E40 1SL/12

High Pressure Sodium lamp with clear tubular outer bulb shape, high output and longest reliable lifetime

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- HF gear must comply with Philips LDi guideline
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	E40 [E40]
Operating position	UNIVERSAL [Any or Universal (U)]
Life to 5% failures (nom.)	28000 h
Life to 10% failures (nom.)	32000 h
Life to 20% failures (nom.)	36500 h
Life to 50% failures (nom.)	45000 h
System description	External Ignitor (E)
LSF 2000 h Rated	100 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	99 %
LSF 16000 h Rated	99 %
LSF 20000 h Rated	99 %


Light Technical	
Colour Code	- [Not Specified]
Luminous flux (rated) (nom.)	18200 lm
Chromaticity coordinate X (nom.)	535
Chromaticity coordinate Y (nom.)	420
Correlated Colour Temperature (Nom)	1950 K
Luminous efficacy (rated) (nom.)	118.51 lm/W
Color rendering index (max.)	25
LLMF 2000 h Rated	99 %
LLMF 4000 h Rated	98 %
LLMF 6000 h Rated	97 %
LLMF 8000 h Rated	96 %
LLMF 12000 h Rated	96 %
LLMF 16000 h Rated	95 %
LLMF 20000 h Rated	94 %

MASTER SON-T APIA Plus Xtra

Ratio scotopic/photopic lumens	0.55
Operating and Electrical	
Power (Rated) (Nom)	154 W
Lamp current (EM) (nom.)	0.178 A
Ignition supply voltage (max.)	198 V
Ignition peak voltage (max.)	2800 V
Re-ignition time (min.) (max.)	180 s
Ignition time (max.)	5 s
Voltage (Max)	115 V
Voltage (Min)	85 V
Voltage (Nom)	98 V
Controls and Dimming	
Dimmable	Yes
Run-up time 90% (max.)	4 min
Mechanical and Housing	
Lamp Finish	Clear
Approval and Application	
Energy efficiency label (EEL)	A+

Mercury (Hg) content (nom.)	15.1 mg
Energy consumption kWh/1,000 hours	169 kWh
Luminaire Design Requirements	
Bulb temperature (max.)	450 °C
Cap-base temperature (max.)	250 °C
Product Data	
Full product code	872790092733700
Order product name	MASTER SON-T APIA Plus Xtra 150W E40 1SL/12
EAN/UPC – product	8727900927337
Order code	92733700
SAP numerator – quantity per pack	1
Numerator – packs per outer box	12
SAP material	928150319230
SAP net weight (piece)	140.000 g
ILCOS code	ST-150-H/E-E40

Dimensional drawing





SON-T APIA Plus Xtra 150W E40

Product	D (max)	O	L	C (max)
MASTER SON-T APIA Plus Xtra 150W E40 1SL/12	48 mm	61 mm	132 mm	210 mm

MASTER SON-T APIA Plus Xtra



Photometric data

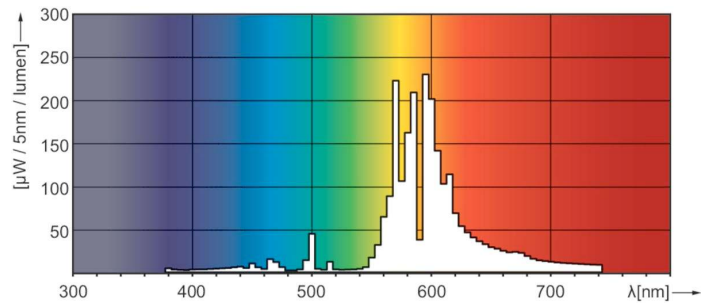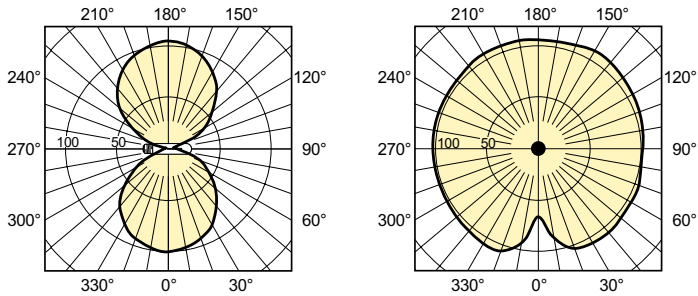

LDLD_SONTAPIA-Light distribution diagram

LDPO_SONTAPIA_0002-Spectral power distribution Colour

Lifetime

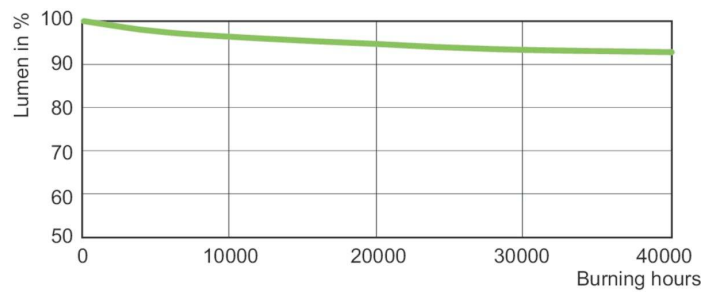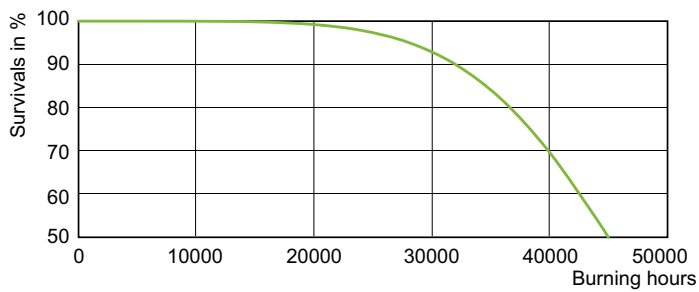

LDLE_SONTAPIA_0005-Life expectancy diagram

LDLM_SONTAPIA_0001-Lumen maintenance diagram

