



MSR

MSR 700/2 1CT/8

The high color rendering index of the single ended MSR series ensures that everyone in the audience can enjoy the true colors of the scenery, the stage props, the players and their costumes – in fact everything that is on stage can be made bright and vivid in daylight quality light. Also, thanks to the single ended lamp concept, the luminaire has optimal light collection and direction possibilities to help ensure brightness on stage exactly where and when it is needed. In addition, the MSR can be used in any burning position for easy set-up and convenience.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	G22 [G22]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 50% Failures (Nom)	1,000 hour(s)

Light Technical	
Color Code	2
Luminous Flux	55,000 lumen
Chromaticity Coordinate X (Nom)	302
Chromaticity Coordinate Y (Nom)	320
Correlated Color Temperature (Nom)	7200 K
Luminous Efficacy (rated) (Nom)	78 lm/W
Color rendering index (CRI)	80

Operating and Electrical	
Power Consumption	700 W
Lamp Current (Nom)	11 A


Controls and Dimming	
Dimmable	No

Product Data	
Full product code	872790091638600
Order product name	MSR 700/2 1CT/8
Order code	91638600
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8
Material Nr. (12NC)	928171505114
Full product name	MSR 700/2 1CT/8

MSR


EAN/UPC - Case	8727900916393
EAN/UPC - Product/Case	8727900916386

Dimensional drawing

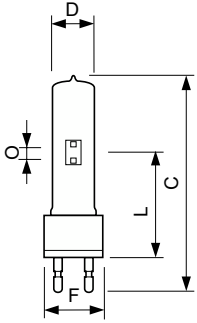

Product	D (max)	O	L (min)	L (max)	L	C (max)	F
MSR 700/2 1CT/8	30 mm	8.0 mm	74 mm	76 mm	75 mm	152 mm	42 mm

Photometric data

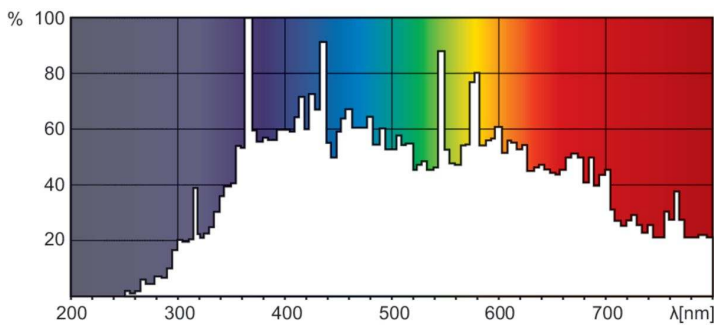

Spectral Power Distribution Colour - MSR 700/2 1CT/8

