

CoreLine Recessed

RC136B 28S_34S_40S/830 PSD W30L120OCELB3

CORELINE RECESSED GEN3 - 830 warm white - Power supply unit with DALI interface

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Recessed range of LED products can be used to replace functional luminaires in general lighting applications. The process of selecting, installing and maintaining is so easy – it's a simple switch.

Warnings and Safety

- The product is IPX0 and as such is not protected against water ingress, so we strongly recommend that the environment in which the luminaire is to be installed is suitably checked
- If the above advice is not taken and the luminaires are subject to water ingress, Philips/Signify cannot guarantee safe failure and product warranty will become void

Product data

General information		Cable	
Beam angle of light source	- °	Cable	Cable with connector 5-pole
Light source colour	830 warm white	Protection class IEC	Safety class II (II)
Light source replaceable	No	Glow-wire test	650/30 [Temperature 650 °C, duration 30 s]
Number of gear units	1 unit	Flammability mark	F [For mounting on normally flammable surfaces]
Driver/power unit/transformer	PSD [Power supply unit with DALI interface]	CE mark	CE mark
Driver included	Yes	ENEC mark	ENEC mark
Optic type	Beam angle 84°	Warranty period	5 years
Luminaire light beam spread	84°	Constant light output	No
Control interface	DALI	Number of products on MCB (16 A type B)	30
Connection	CU7 [Connection unit 7-pole]	Photobiological risk	Photobiological risk group 0 @ 200mm to EN62471

CoreLine Recessed

EU RoHS compliant	Yes
Product family code	RC136B [CORELINE RECESSED GEN3]
Unified glare rating CEN	19

Light technical

Saturated Red	<50
Flickering	1
Stroboscopic effect	0.4

Operating and electrical

Input Voltage	220-240 V
Input frequency	50 or 60 Hz
Initial CLO power consumption	- W
Average CLO power consumption	- W
Inrush current	15.6 A
Inrush time	0.23 ms
Power factor (min.)	0.9

Controls and dimming

Dimmable	Yes
----------	-----

Mechanical and housing

Housing material	Steel
Reflector material	Polycarbonate
Optic material	Polycarbonate
Optical cover/lens material	Polymethyl methacrylate
Fixation material	-
Overall length	1197 mm
Overall width	297 mm
Overall height	44 mm
Colour	White
Dimensions (height x width x depth)	44 x 297 x 1197 mm (1.7 x 11.7 x 47.1 in)

Approval and application

Ingress protection code	IP20/44 [Finger-protected; wire-protected, splash-proof]
Mech. impact protection code	IK03 [0.3 J]

Sustainability rating	-
-----------------------	---

Initial performance (IEC compliant)

Initial luminous flux (system flux)	4000 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	118 lm/W
Init. Corr. Colour Temperature	3000 K
Init. Colour rendering index	>80
Initial chromaticity	(0.43, 0.40) SDCM ≤3
Initial input power	34 W
Power consumption tolerance	+/-10%

Over time performance (IEC compliant)

Control gear failure rate at median useful life 50,000 h	5 %
Lumen maintenance at median useful life* 50,000 h	L80

Application conditions


Ambient temperature range	0 to +25 °C
Performance ambient temperature Tq	25 °C
Maximum dimming level	3%
Suitable for random switching	Yes

Product data

Full product code	871869997551700
Order product name	RC136B 28S_34S_40S/830 PSD W30L120OCELB3
EAN/UPC – product	8718699975517
Order code	97551700
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
SAP material	910505101244
Copy Net Weight (Piece)	3.500 kg




Dimensional drawing

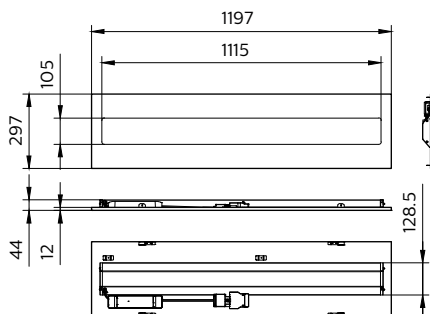


RC136B 28S_34S_40S/830 PSD W30L120OCELB3


Photometric data

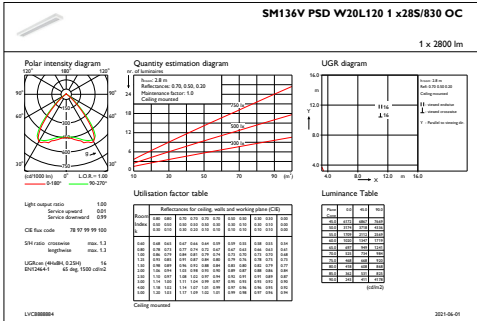


IFGU1_SM136VPSDW20L1201x285830OC




OFPC1_RC136BPSDW30L120ELB31x345830OC

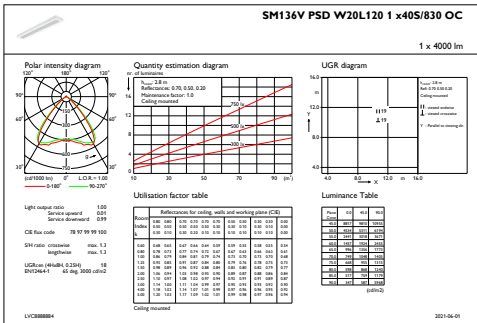


IFGU1_SM136VPSDW20L1201x405830OC

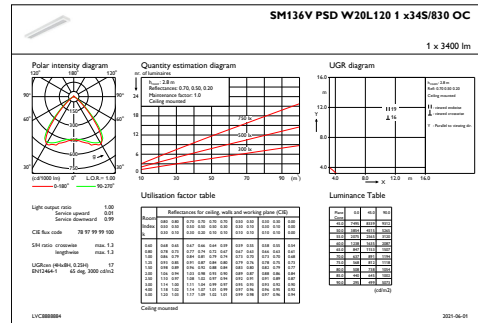

IFGU1_SM136VPSDW20L1201x345830OC


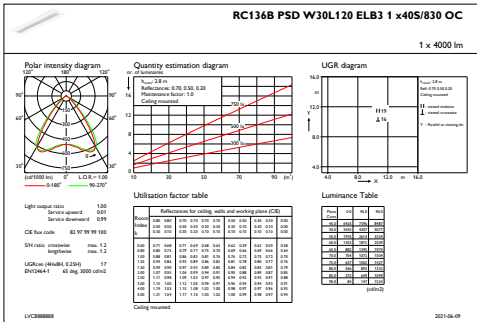


IFGU1_RC136BPSDW30L120ELB31x405830OC

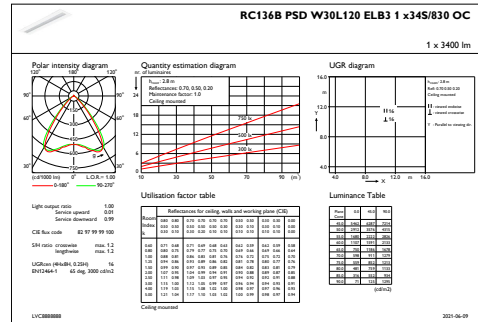



IFGU1_RC136BPSDW30L120ELB31x345830OC

Photometric data





OFPC1_SM136VPSDW20L1201x285830OC

OFPC1_SM136VPSDW20L1201x405830OC



OFPC1_RC136BPSDW30L120ELB31x405830OC

OFPC1_SM136VPSDW20L1201x345830OC

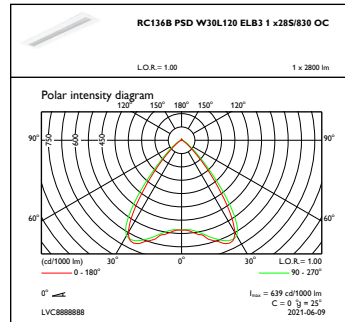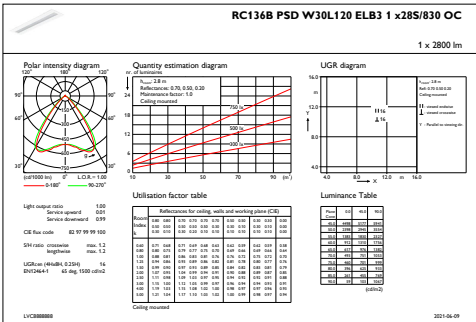

IFGU1_RC136BPSDW30L120ELB31x285830OC

OFPC1_RC136BPSDW30L120ELB31x285830OC

CoreLine Recessed

