



# CoreLine Recessed

## RC136B 28S\_34S\_40S/830 PSD W30L120 OC

830 warm white – Power supply unit with DALI interface

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Recessed range of LED products can be used to replace functional luminaires in general lighting applications. The process of selecting, installing and maintaining is so easy – it's a simple switch.

### Warnings and Safety

- The product is IPX0 and as such is not protected against water ingress, so we strongly recommend that the environment in which the luminaire is to be installed is suitably checked
- If the above advice is not taken and the luminaires are subject to water ingress, Philips/Signify cannot guarantee safe failure and product warranty will become void

### Product data

General Information			
Beam angle of light source	- °	Glow-wire test	650/30 [ Temperature 650 °C, duration 30 s]
Light source colour	830 warm white	Flammability mark	F [ For mounting on normally flammable surfaces]
Light source replaceable	No	CE mark	CE mark
Number of gear units	1 unit	ENEC mark	ENEC mark
Driver/power unit/transformer	PSD [ Power supply unit with DALI interface]	Warranty period	5 years
Driver included	Yes	Constant light output	No
Optic type	Beam angle 84°	Number of products on MCB (16 A type B)	30
Luminaire light beam spread	84°	Photobiological risk	Photobiological risk group 0 @ 200mm to EN62471
Control interface	DALI	EU RoHS compliant	Yes
Connection	CU5 [ Connection unit 5-pole]	Unified glare rating CEN	19
Cable	Cable with connector 5-pole		
Protection class IEC	Safety class II (II)		

# CoreLine Recessed

Light Technical	
Saturated Red	<50
Operating and Electrical	
Input Voltage	220 to 240 V
Input frequency	50 or 60 Hz
Initial CLO power consumption	- W
Average CLO power consumption	- W
Inrush current	15.6 A
Inrush time	0.23 ms
Power factor (min.)	0.9
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Housing material	Steel
Reflector material	Polycarbonate
Optic material	Polycarbonate
Optical cover/lens material	Polymethyl methacrylate
Fixation material	-
Overall length	1197 mm
Overall width	297 mm
Overall height	44 mm
Colour	White
Dimensions (height x width x depth)	44 x 297 x 1197 mm (1.7 x 11.7 x 47.1 in)
Approval and Application	
Ingress protection code	IP20/44 [ Finger-protected; wire-protected, splash-proof]
Mech. impact protection code	IK03 [ 0.3 J]
Initial Performance (IEC Compliant)	
Initial luminous flux (system flux)	2800 3400 4000 lm

Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	130 lm/W
Init. Corr. Colour Temperature	3000 K
Init. Colour rendering index	>80
Initial chromaticity	(0.43, 0.40) SDCM ≤3
Initial input power	22 26 31 W
Power consumption tolerance	+/-10%

## Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50,000 h	5 %
Lumen maintenance at median useful life* 50,000 h	L80

## Application Conditions


Ambient temperature range	-10 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dimming level	3%
Suitable for random switching	Not applicable

## Product Data

Full product code	871951451222100
Order product name	RC136B 28S_34S_40S/830 PSD W30L120 OC
EAN/UPC – product	8719514512221
Order code	51222100
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
SAP material	911401880881
SAP net weight (piece)	3.000 kg





## Dimensional drawing

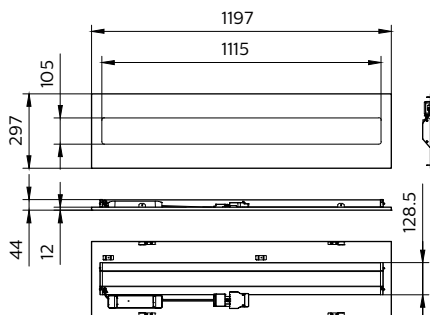



CoreLine Recessed RC134B/RC135B

## Photometric data

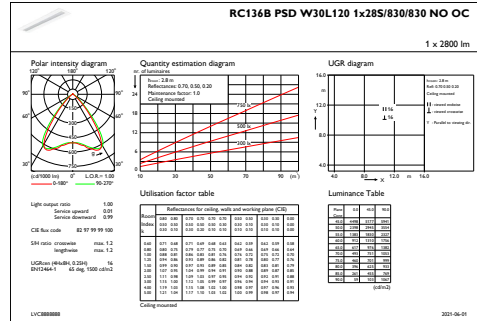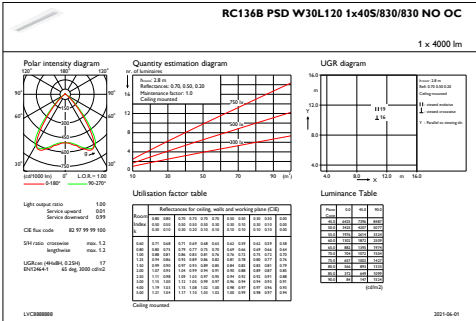



IFGU1\_

IFGU1\_

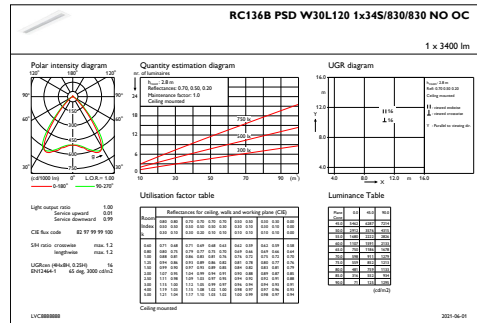

OFPC1\_

IFGU1\_



OFPC1\_

OFPC1\_

## CoreLine Recessed

