



# Actinic BL PL-S/PL-L

## PL-L 18W/10/4P 1CT/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap base	2G11 [ 2G11]
Main application	Insect traps
Life to 50% failures (nom.)	15000 h
Useful life (nom.)	5000 h
Light Technical	
Colour Code	10
Colour designation	Ultra Violet A
Chromaticity coordinate X (nom.)	228
Chromaticity coordinate Y (nom.)	215
UV Depreciation at 2,000 h	20 %
UV depreciation at 5000 hours	35 %


Operating and Electrical	
Power (Rated) (Nom)	18 W
Lamp current (nom.)	0.375 A
Voltage (Nom)	58 V
Mechanical and Housing	
Cap-base information	4 Pins (4P)
UV	
UV-A radiation 100 hours (IEC)	3.5 W
Product Data	
Full product code	871150026018540
Order product name	PL-L 18W/10/4P 1CT/25
EAN/UPC – product	8711500260185

# Actinic BL PL-S/PL-L

Order code	26018540
SAP numerator – quantity per pack	1
Numerator – packs per outer box	25
SAP material	927903001007

SAP net weight (piece)	60.900 g
------------------------	----------


## Dimensional drawing




PL-L 18W/10/4P

Product	D1 (max)	D (max)	A (max)	B (max)	C (max)
PL-L 18W/10/4P 1CT/25	18 mm	39 mm	194.2 mm	220 mm	226.6 mm

## Photometric data

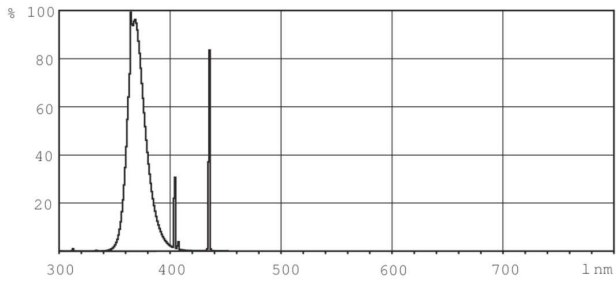

XDPB\_XURPLL\_0001-Spectral power distribution B/W

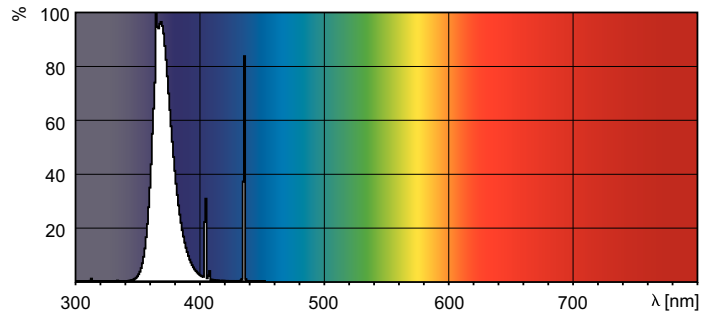

XDPO\_XURPLL\_0001-Spectral power distribution Colour

