



# CorePro LEDcandle

## CorePro LEDcandle ND 3.5-25W E14 840 B35 FR

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LED lamps deliver huge energy savings and minimize maintenance cost.


### Product data

General Information		Warm-up time to 60% light (nom.)		0.5 s
Cap base	E14 [ E14]	Power factor (nom.)	0.4	
EU RoHS compliant	Yes	Voltage (Nom)	220-240 V	
Nominal lifetime (nom.)	15000 h	<b>Temperature</b>		
Switching cycle	50,000X	T-Case maximum (nom.)	75 °C	
Technical type	3.5-25W	<b>Controls and Dimming</b>		
<b>Light Technical</b>		Dimmable	No	
Colour Code	841 [ CCT of 4100K (841)]	<b>Mechanical and Housing</b>		
Luminous flux (nom.)	290 lm	Lamp Finish	Frosted	
Colour designation	Cool White (CW)	<b>Approval and Application</b>		
Correlated Colour Temperature (Nom)	4000 K	Energy efficiency label (EEL)	A+	
Luminous efficacy (rated) (nom.)	82.86 lm/W	Energy consumption kWh/1,000 hours	4 kWh	
Colour consistency	<6	<b>Product Data</b>		
Colour rendering index (nom.)	80	Full product code	871869654348100	
LLMF at end of nominal lifetime (nom.)	70 %	Order product name	CorePro LEDcandle ND 3.5-25W E14 840 B35 FR	
<b>Operating and Electrical</b>		EAN/UPC – product	8718696543481	
Input frequency	50 to 60 Hz	Order code	54348100	
Power (Rated) (Nom)	3.5 W	SAP numerator – quantity per pack	1	
Lamp current (nom.)	35 mA			
Wattage equivalent	25 W			
Starting time (nom.)	0.5 s			

# CorePro LEDcandle

Numerator – packs per outer box	10
SAP material	929001205602
SAP net weight (piece)	0.040 kg



## Dimensional drawing



LED ND 3.5-25W E14 840 B35 FR

Product	D	C
CorePro LEDcandle ND 3.5-25W E14 840 B35 FR	35 mm	106 mm

## Photometric data

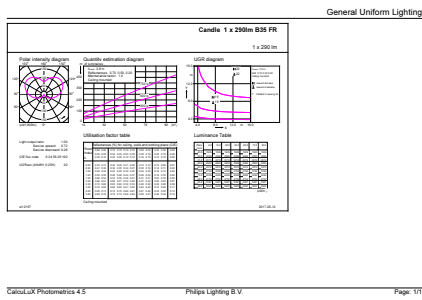

CorePro LEDcandle 25W E14 840 FR B35

CorePro LEDcandle 25W E14 840 FR B35



SDPO\_LEDCL\_0005-Spectral Power distribution

# CorePro LEDcandle

## Lifetime



LEDbulb 60W E14 827 FR B38



LEDbulb 60W E14 827 FR B38

