



# MASTERColour CDM-T

## MASTERColour CDM-T 250W/942 G12 1CT/12

Range of single-ended, compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Lamps may use electronic or electromagnetic control gear, except 35W/942 and 20W lamps, which must use electronic control gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		Colour designation	
Cap base	G12 [ G12]		Cool White (CW)
Operating position	UNIVERSAL [ Any or Universal (U)]	Lumen maintenance 10,000 hours (nom.)	86 %
Life to 5% failures (nom.)	3500 h	Lumen maintenance 2,000 hours (nom.)	98 %
Life to 10% failures (nom.)	10000 h	Lumen maintenance 5,000 hours (nom.)	94 %
Life to 20% failures (nom.)	12000 h	Chromaticity coordinate X (nom.)	0.376
Life to 50% failures (nom.)	15000 h	Chromaticity coordinate Y (nom.)	0.368
ANSI code HID	-	Correlated Colour Temperature (Nom)	4200 K
		Luminous efficacy (rated) (nom.)	105 lm/W
		Colour rendering index (nom.)	91
		Ratio scotopic/photopic lumens	1.75
Light Technical		Operating and Electrical	
Colour Code	942 [ CCT of 4,200 K]	Power (Rated) (Nom)	250.0 W
Luminous flux (rated) (min.)	23400 lm		
Luminous flux (rated) (nom.)	26250 lm		

# MASTERCcolour CDM-T

Lamp current run-up (max.)	6 A
Lamp current (EM) (nom.)	3.04 A
Ignition supply voltage (max.)	198 V
Ignition peak voltage (max.)	5000 V
Ignition supply voltage (min.)	198 V
Ignition peak voltage (min.)	3500 V
Re-ignition time (min.) (max.)	15 min
Ignition time (max.)	30 s
Voltage (Max)	104 V
Voltage (Min)	84 V
Voltage (Nom)	93 V

## Controls and Dimming

Dimmable	No
Run-up time 90% (max.)	3 min

## Mechanical and Housing

Lamp Finish	Clear
-------------	-------

## Approval and Application

Energy efficiency label (EEL)	A+
Mercury (Hg) content (nom.)	20.0 mg
Energy consumption kWh/1,000 hours	272 kWh

## UV

PET (NIOSH) (min.)	8 h/500lx
Damage factor D/fc (nom.)	0.28


## Luminaire Design Requirements

Bulb temperature (max.)	700 °C
Cap-base temperature (max.)	280 °C
Pinch temperature (max.)	350 °C

## Product Data

Full product code	871150021112515
Order product name	MASTERCcolour CDM-T 250W/942 G12 1CT/12
EAN/UPC – product	8711500211125
Order code	21112515
SAP numerator – quantity per pack	1
Numerator – packs per outer box	12
SAP material	928094205131
SAP net weight (piece)	0.039 kg
ILCOS code	MT/UB-250/942-H-G12-25/135

## Dimensional drawing





CDM-T 250W/942 G12

Product	D (max)	O	L (min)	L (max)	L	C (max)
MASTERCcolour CDM-T	25 mm	12.3	71.5 mm	73.5 mm	72.5	135 mm
250W/942 G12 1CT/12		mm			mm	


# MASTERCoulour CDM-T

## Photometric data

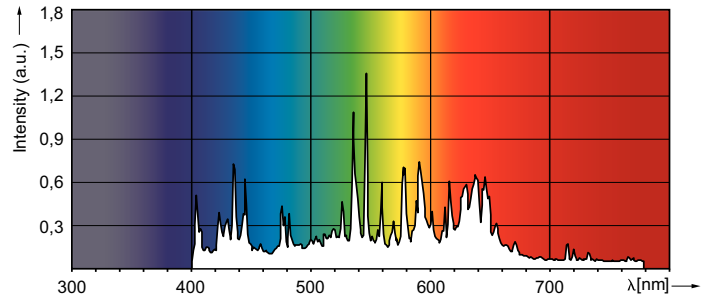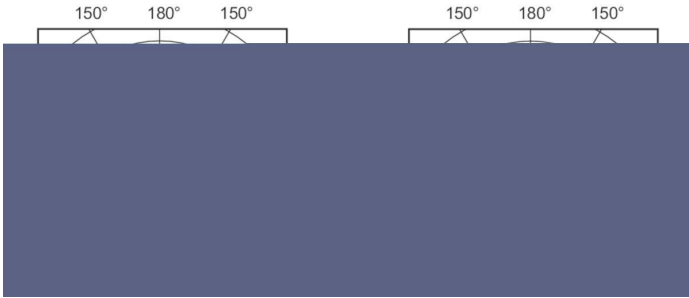

LDPO\_CDM-T\_250W\_942-Spectral power distribution Colour

## Lifetime

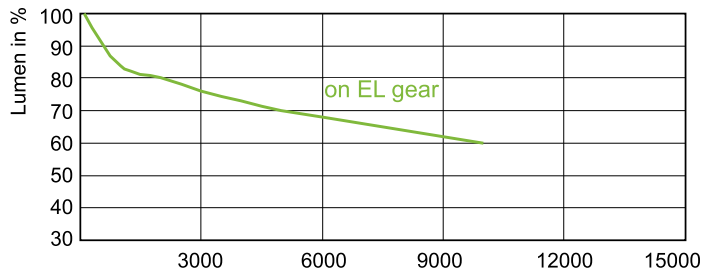

LDLM\_CDM-T\_250W\_942-Lumen maintenance diagram

